

T&S BRASS AND BRONZE WORKS, INC.

2 Saddleback Cove / P.O. Box 1088 Travelers Rest, SC 29690



Model No.

Item No.

EC-3101

Sheet: 1 of 2

EG. #A2601 ISO #9001

Travelers Rest, SC: 800-476-4103 Simi Valley, CA: 800-423-0150 Fax: 864-834-3518 www.tsbrass.com ChekPoint* This Space for Architect/Engineer Approval Job Name Date Model Specified Quantity **ADA Compliant** Customer/Wholesaler____ Rigid Gooseneck w/2.2 GPM [8.3 L/min] Contractor Vandal Resistant Aerator Architect/Engineer_ Suitable for Mounting Surfaces Up To 15/16" [24mm] Thick 11" WALL Requires [280mm] Ø1" [25mm] 4 1/8" Mounting Hole 1/2" NPSM x 3/8" NPSM [104mm] 24" [610mm] 5 5/8" 30" [762mm] Long Flexible Furnished Sensor Cable > St. Steel Hose (1) [141mm] w/ Short El For Restricted Space Installations 3 5/8" x 4 3/16" x 2" Deep [92mm x 106mm x 51mm] Unscrew Set Removeable Waterproof Control Module Box (Blue) Screw in Body Strainerw/ Internal Flow Control Setting Switches to desired height AC or DC operated w/ (4) AA Batteries for Anti-rotation feature. **Temperature** (See Mounting Mixing Valve Hole Detail) 100-135 VAC Adapter w/ 144" [3658mm] Long Power Cord. (Remove Rubber Plugs Mounting Hole on Module and Detail Cable to Connect) Ø1" [25mm] Thru Furnished w/ (2) 1 9/32" 3/8" Compression x 1/2" NPSM [32mm] 18" [457mm] Flex. St. Steel Supply Hose NOTE: Supply Stops by Others Ø9/32" [7mm] Product Specifications: Chrome Plated Brass Electronic Faucet: Drawn Checked Approved Wall Mount Rigid Gooseneck w/ VR Aerator, AC/DC **GFF** JRM JHB Control Module with Internal Flow Control Setting Switches. Date: Scale: Temperature Control Mixing Valve, 18" Lg Hot & Cold Supply NTS 09/11/08 Stop Flexible Connector Hoses



T&S BRASS AND BRONZE WORKS, INC.


2 Saddleback Cove / P.O. Box 1088 Travelers Rest, SC 29690



Model No. EC-3101

Item No.

Travelers Rest, SC: 800-476-4103 Simi Valley, CA: 800-423-0150 Fax: 864-834-3518 www.tsbrass.com

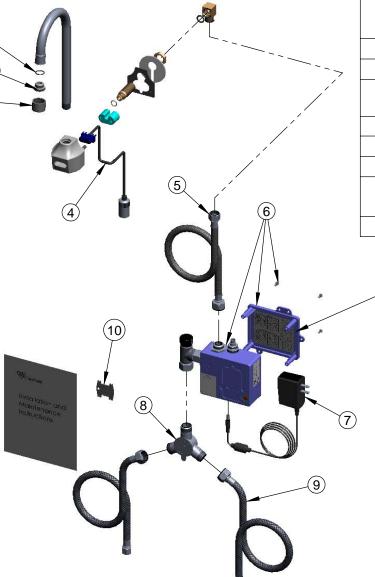

ITEM NO.	SALES NUMBER	DESCRIPTION				
1	B-0199-06	VR Aerator w/ Key				
2	044A	3/8" to Aerator Adapter				
3	006575-45	-015 O-Ring				
4	017195-45	Angled Sensor w/ Cable				
5	016325-45	Inlet Hose, Faucet, 1/2" NPSM-F x 3/8" NPSM-F				
6	016647-45	ChekPoint Module (Blue)				
7	5EF-0002	A/C Transformer				
8	5EF-0006	Manual Mixing Valve				
9	5EF-0005	Supply Hose, 9/16-24 Female x 1/2" NPSM				
10	Q015425-45	Vandal Resistant Key				

Label for Flow Control Switch Settings is located on Inside of Back Cover.

Flow Control Switches are located inside Module Housing in Black Box next to Battery Compartment.
*Switches are set to DEFAULT position: Auto Time Out = 10 seconds
Shut Off Delay = 1 second.

Remove (4) screws and back cover to access switches.

- *Available Water Flow Control Selections:
- (6) Auto Time Out Selections 10 sec, 25 sec, 45 sec, 60 sec, 3 min, 20 min
- (6) Shut Off Delay Selections 1 sec, 2 sec, 3 sec, 4 sec, 5 sec, 6 sec

Product Specifications: Chrome Plated Brass Electronic Faucet:
Wall Mount Rigid Gooseneck w/ VR Aerator, AC/DC
Control Module with Internal Flow Control Setting Switches,
Temperature Control Mixing Valve, 18" Lg Hot & Cold Supply
Stop Flexible Connector Hoses

	Sh	eet	. 2	of	2

JHB

09/11/08

Approved

Date: